

Bit						
8 7	6 5	4	3	2	.1	
Payload	RRBP	S/P		USF		MAC header -
Type						
PR		TFI			FBI	Octet 1
BSN					E	Octet 2
Length indicator				M	E	Octet 3 (optional)
•						
						<b>.</b> .
Length indicator				M	LE.	Octet M (optional)
						Octet M+1
						•
RLC data						•
						0.1.110.4
						Octet N2-1
						Octet N2
spare				spare	•	(if present)
		•		. EIC	2 2	•

## BEST AVAILABLE COPY

FIG. 1


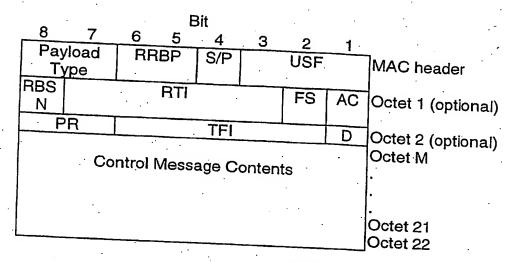


FIG. 3

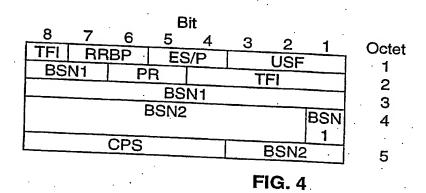

Bit 5 3 Octet RRBP ES/P USF 1 BSN<sub>1</sub> PR TFI 2 BSN1 3 **CPS** BSN FIG. 5

Applients: VENDEL and er al.

Applients: VENDEL and er al.

Title: Method for detecting multiuser behavior on an Attorney Docket No.: 102132-27

3/3

